


MODIF EXPORT SUPERSTAR 3900 EFT

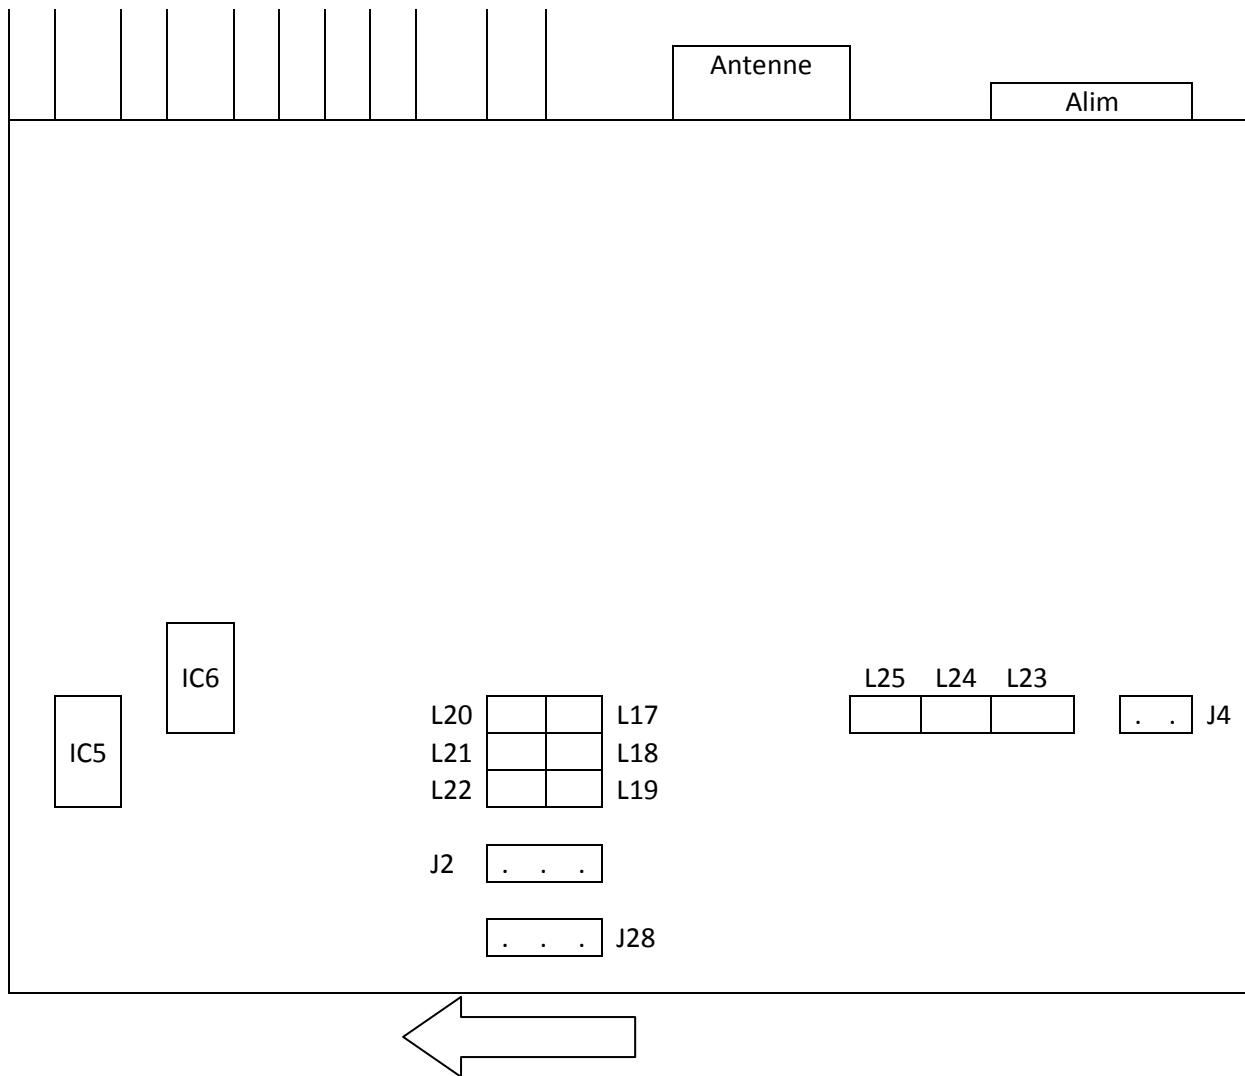

MOVE THE STRAP **J28** OF A NOTCH IN THE SENSE OF THE ARROW

MOVE THE CONNECTOR **J4** ON THE CONNECTOR **J2**

DELETE THE WELDED RESISTANCE ON **IC5** (weld side)

VR 13 MODULATION SSB

VR 17 POWER SSB

VR 16 MODULATION AM

VR 14 POWER AM/FM

VR 18 ADJUSTMENT MINIMUM POWER


VR 9 VU-METER TX



Modif export en image du SS 3900 EFT


Démonter les 2 capots et retirer la résistance côté soudures

DELETE THE WELDED RESISTANCE ON **IC5** (weld side)

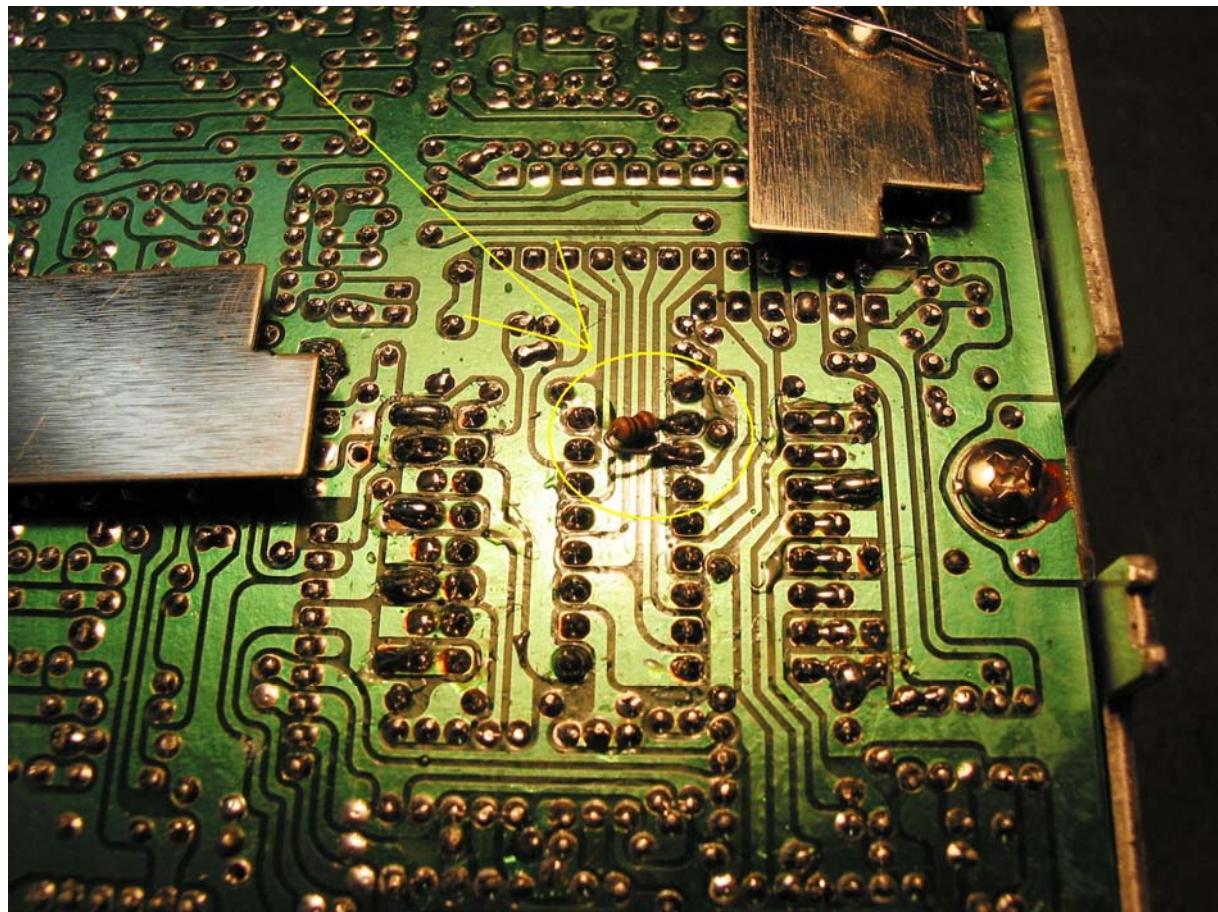


Coté composant démonter la vis de la platine écho


Take down the screw on the echo board

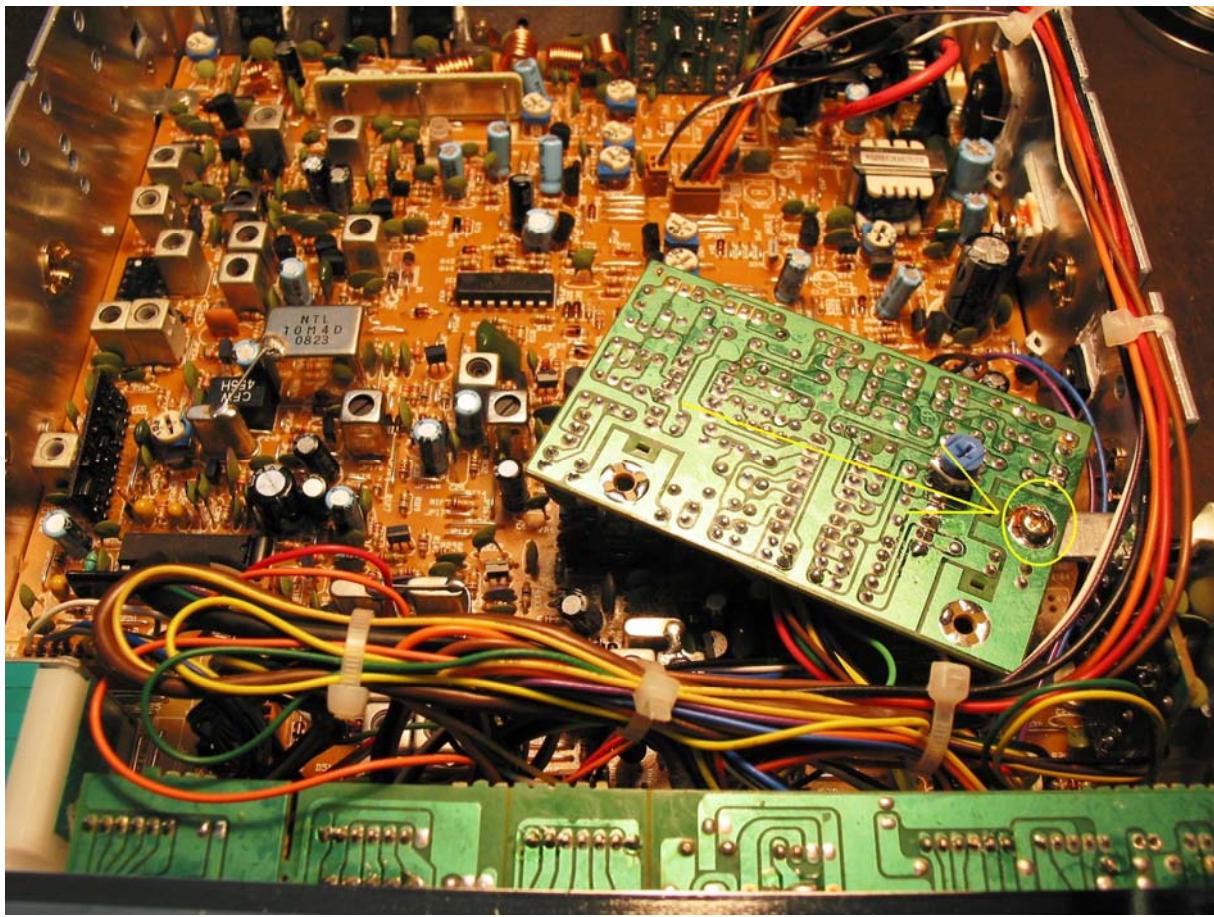

-Voici le fil qui est branché sur J4 et qui faut brancher sur J2


- You can move the echo board to reach the wire which is on J4 : disconnect the wire on J4

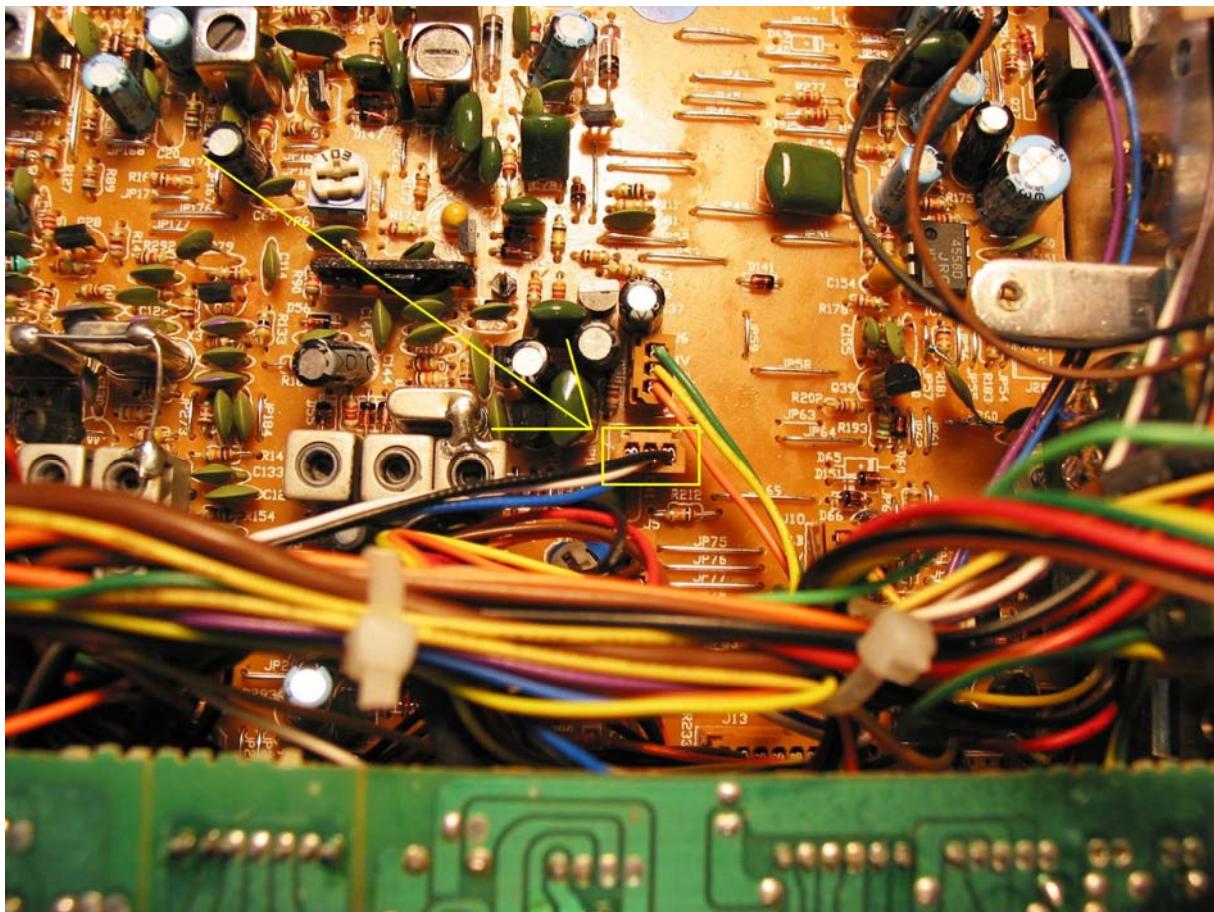

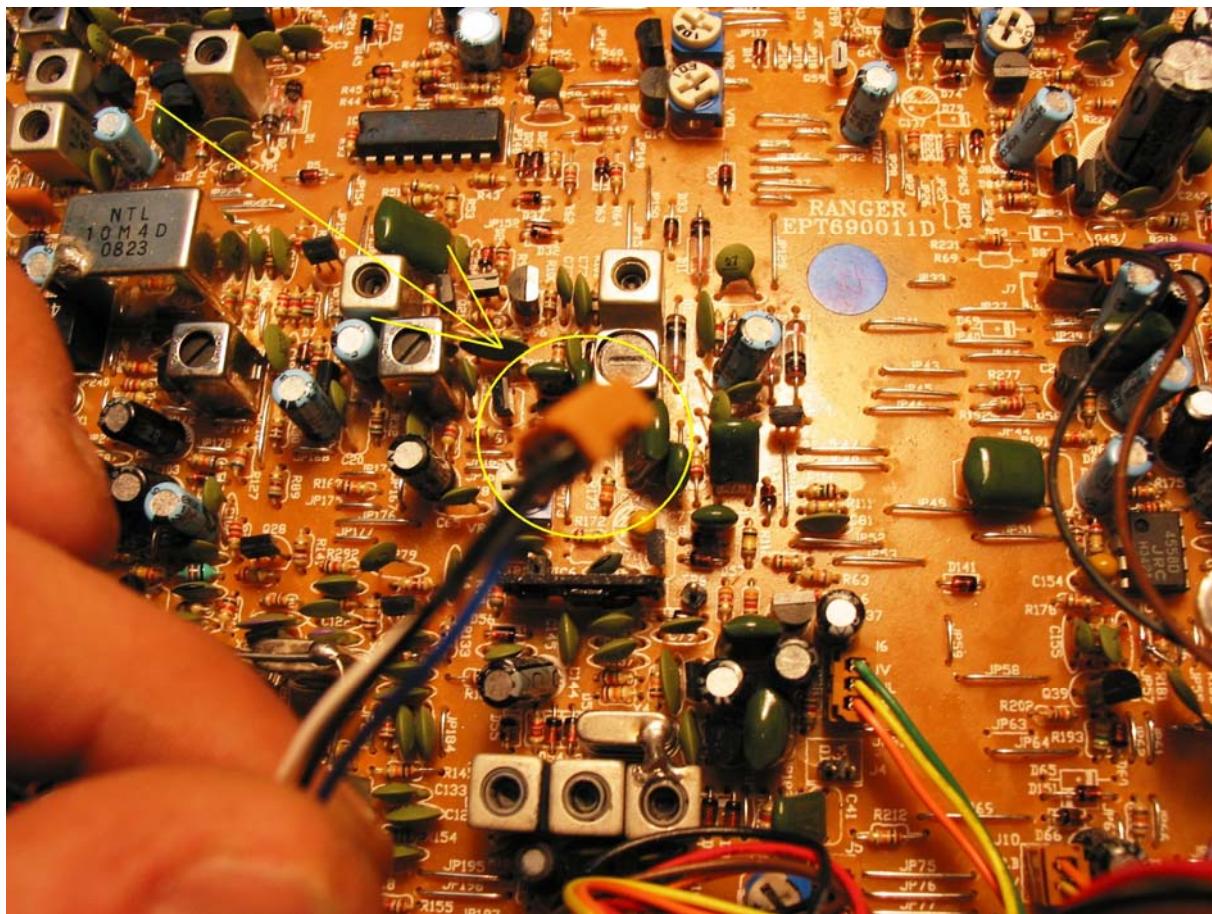


Rechercher au milieu des fils le connecteur J2

Look for the connector J2 in the middel of the wires

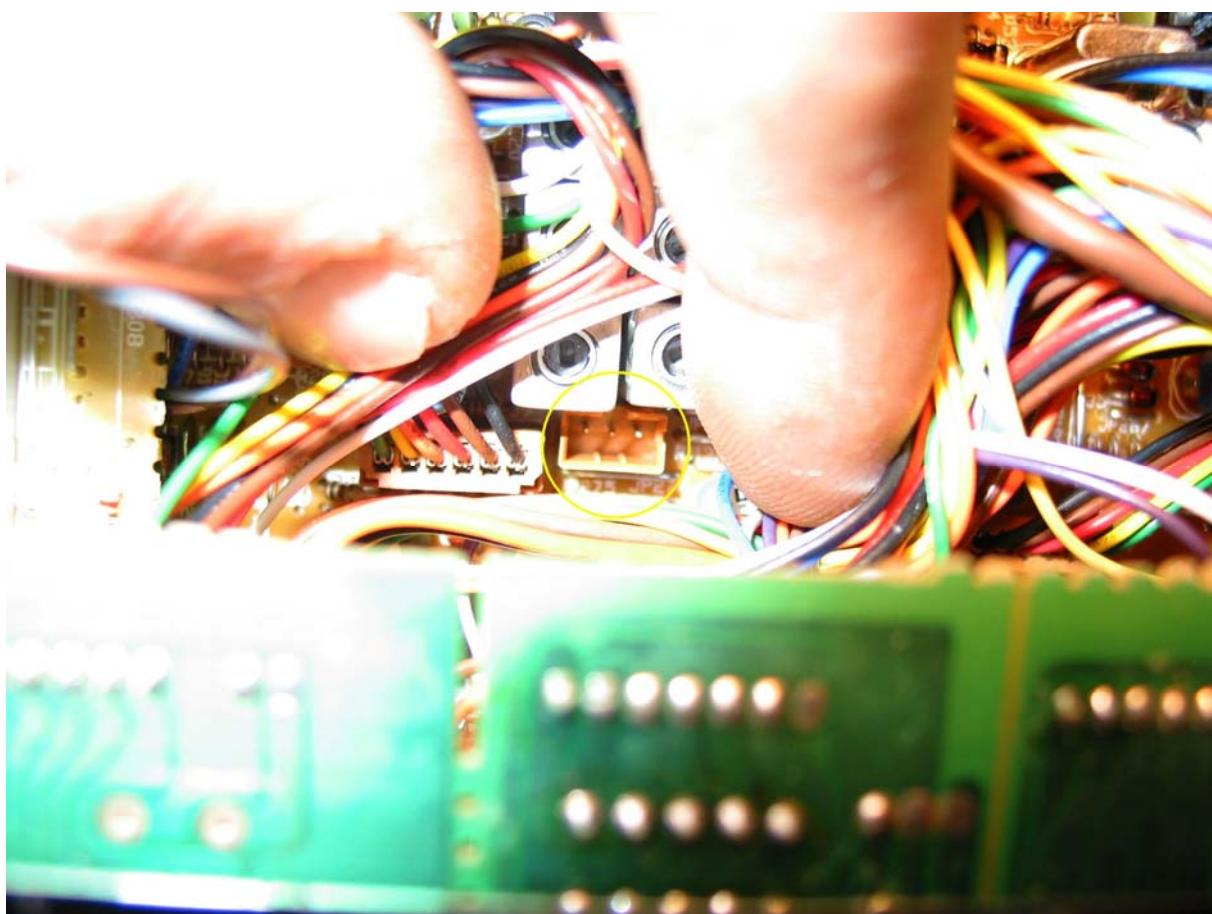

- brancher le fil J4 sur le connecteur J2
- CONNECT the wire J4 on the connector J2

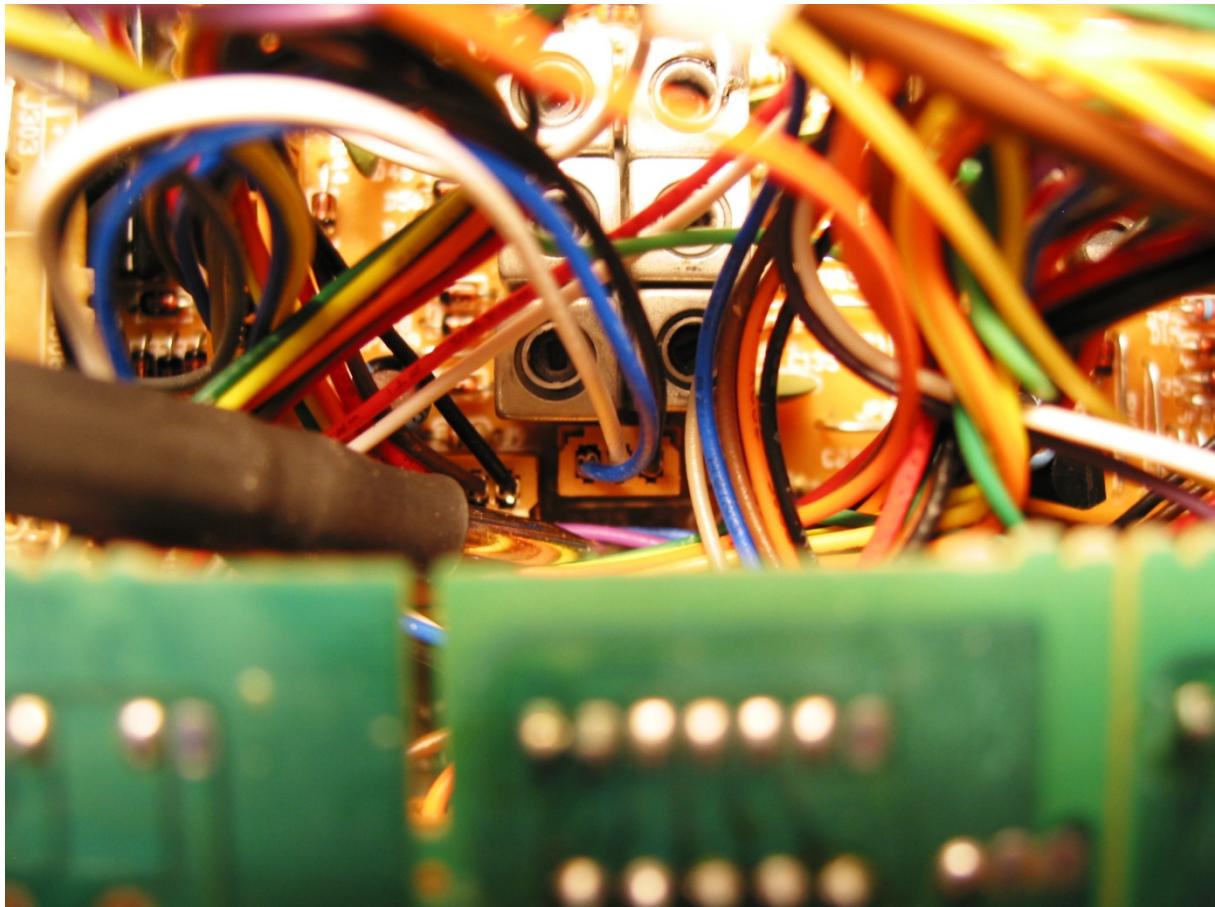

- Déplacer vers la droite le cavalier de configuration

- MOVE THE STRAP **J28** on the right

