

PRESIDENT

New range, perfect harmony !

JOHNNY III ASC

« Allegro »



- Roger Beep • Scan function
- Memorization of a priority channel
- Large display with LCD
- Lock function • Key beep
- Vox (hands free function)

Downloaded from www.cbradio.nl

Groupe
PRESIDENT
ELECTRONICS


0972/08-09 C0165

S.A. Capital 5.000.000 €

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC

Site : <http://www.president-electronics.com> – e-mail : groupe@president-electronics.com



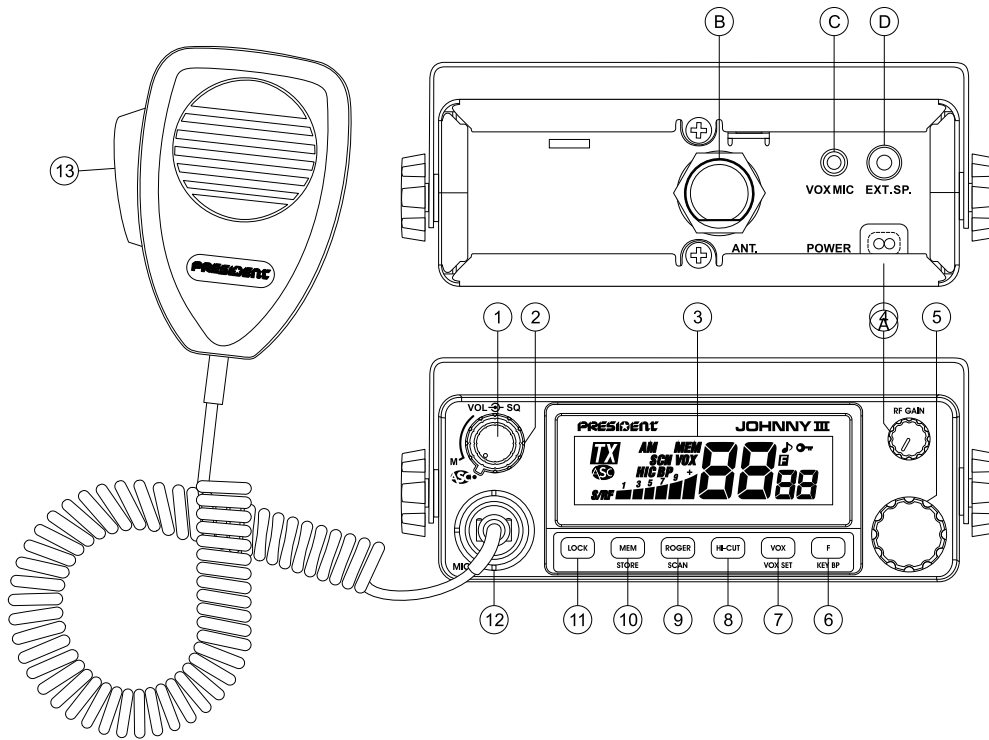

- | | |
|---|---|
| <p>1) ON/OFF – VOLUME 2) ASC (Automatic Squelch Control) / SQUELCH 3) DISPLAY 4) RF GAIN 5) CHANNEL SELECTOR: Rotary Knob 6) F ~ KEY BP 7) VOX ~ VOX SET 8) HI-CUT</p> | <p>9) ROGER ~ SCAN 10) STORE ~ MEM 11) LOCK 12) 6 PIN MICROPHONE PLUG 13) PTT A) DC-POWER TERMINAL (13,2 V) B) ANTENNA CONNECTOR (SO-239) C) JACK FOR OPTIONAL VOX MIKE (Ø 2.5 mm) D) EXTERNAL SPEAKER JACK (8 Ω, Ø 3,5 mm)</p> |
|---|---|

0973/08-09 C0165b

1) GENERAL

- Channels : 40
- Modulation modes : AM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (in mm) : 125 (L) x 150 (H) x 45 (D)
- Weight : ~ 0.7 kg
- Accessories supplied : Electret microphone with support, mounting cradle, screws.
- Filter : ANL (Automatic Noise Limiter) built-in

2) TRANSMISSION

- Frequency allowance : +/- 200 Hz
- Carrier power : 1 W AM
- Transmission interference : inferior to 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : inferior to 20 µW
- Microphone sensitivity : 7 mV
- Drain : 1,7 A (with modulation)
- Modulated signal distortion : 1,8 %

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.5 µV - 113 dBm
- Frequency response : 300 Hz to 3 kHz
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 2 W
- Squelch sensitivity : minimum 0.2 µV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rej. rate : 70 dB
- Drain : 300 mA nominal
750 mA maximum

Specifications



all european standards

