




**BOND TELECOM CO., LTD.**

820#, No. 1 Building, Internation City Block, Citong Road,  
Fengze District, Quanzhou 362000, Fujian, China.  
Tel: 0086-595-28012708  
Fax: 0086-595-28013708  
Web site: [www.luiton.com](http://www.luiton.com)  
[www.luiton.en.alibaba.com](http://www.luiton.en.alibaba.com)  
[Http://luiton.en.made-in-china.com](http://luiton.en.made-in-china.com)

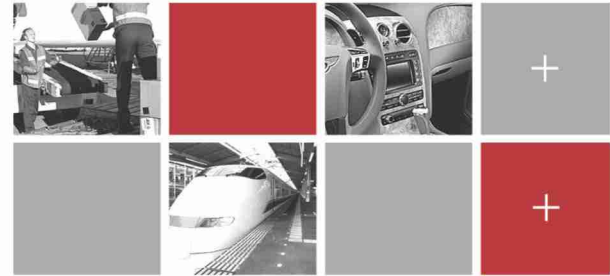


ANALOG & DIGITAL  
TWO WAY RADIO  
GOLDEN SUPPLIER

Downloaded from [www.cb-radio.com](http://www.cb-radio.com)

**LUITON**

Talk To The Future



## CONTENTS

### COMPANY INTRODUCTION

DG-TD501 DMR-8100H	01-02
LT-303 LT-002	03-04
LT-52 LT-66	05-06
LT-K10 LT-56	07-08
LT-558UV LT-558H	09-10
UV-3R UV-5R	11-12
LT-888 LT-278	13-14
LT-M36 LT-M507	15-16
LT-271A / LT-471A LT-281A / LT-481A	17-18
LT-7900R LT-9000	19-20
LT-9900 LT-900	21-22
LT-V8000 LT-2200H	23-24



## **Bond Telecom Co., Ltd.**

Specializes in producing and marketing professional FM radios, with VHF, UHF, dual-band, marine, CB band, DPMR & DMR digital radios, at fixed and portable status. Some models are with CE, RoHS & FCC approval. We have been in this field more than 11 years.

Our main markets are South America, Europe, North America, Asia and the Middle East. Our products have won a good reputation in those markets.

We can offer OEM and ODM services. Please feel free to contact us for further information.

# Factory Corners



## Expertise

Expert Opinion of the Notified Body on the Conformity Assessment according to Article 10.5 of R&TTE Directive 1999/5/EC

**PHOENIX TESTLAB**  
EU Identification Number 0700

Responsible by:  Notified Body

Expertise No.: 13-110357  
Certificate Holder: BOND TELECOM CO., LTD.  
Address: 820# No. 1 Building, Internation-city Block, Chang Road, Fengze District, Quanzhou, Fujian, China.  
Product Description: TWO WAY RADIO  
Brand Name / Model Name: LUTON, KINGPO / LT-66, P-66

Option on the Essential Requirements  
Article 3.1a): Health and Safety: Remarks see annex  
Article 3.1b): Electromagnetic Compatibility: No remarks  
Article 3.2: Effective Use of the Radio Spectrum: No remarks

CE-marking  
Marking Example (Class 2): **CE 0700 0**

This certificate is issued in accordance with the Directive 1999/5/EC of the European Parliament and the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity dated 9<sup>th</sup> March 1999 and is only valid in conjunction with the following annex (2) report.

Bloomberg, 24 January 2013  
Place, Date of Issue:  Signed by Peter Grieb, Notified Body

Phone: +490233-900-34  
Fax: +490233-900-39  
info@phoenix-testlab.de

PHOENIX TESTLAB GmbH  
Königsallee 19  
D-42699 Solingen, Germany  
www.phoenix-testlab.de

## Expertise

Expert Opinion of the Notified Body on the Conformity Assessment according to Article 10.5 of R&TTE Directive 1999/5/EC

**PHOENIX TESTLAB**  
EU Identification Number 0700

Responsible by:  Notified Body

Expertise No.: 13-110513  
Certificate Holder: BOND TELECOM CO., LTD.  
Address: 820# No. 1 Building, Internation-city Block, Chang Road, Fengze District, Quanzhou, Fujian, China.  
Product Description: TWO WAY RADIO, PMR  
Brand Name / Model Name: LUTON, KINGPO / LT-02, G-2

Option on the Essential Requirements  
Article 3.1a): Health and Safety: Remarks see annex  
Article 3.1b): Electromagnetic Compatibility: No remarks  
Article 3.2: Effective Use of the Radio Spectrum: No remarks

CE-marking  
Marking Example (Class 2): **CE 0700 0**

This certificate is issued in accordance with the Directive 1999/5/EC of the European Parliament and the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity dated 9<sup>th</sup> March 1999 and is only valid in conjunction with the following annex (2) report.

Bloomberg, 04 February 2013  
Place, Date of Issue:  Signed by Peter Grieb, Notified Body

Phone: +490233-900-34  
Fax: +490233-900-39  
info@phoenix-testlab.de

PHOENIX TESTLAB GmbH  
Königsallee 19  
D-42699 Solingen, Germany  
www.phoenix-testlab.de

## Expertise

Expert Opinion of the Notified Body on the Conformity Assessment according to Article 10.5 of R&TTE Directive 1999/5/EC

**PHOENIX TESTLAB**  
EU Identification Number 0700

Responsible by:  Notified Body

Expertise No.: 13-110358  
Certificate Holder: BOND TELECOM CO., LTD.  
Address: 820# No. 1 Building, Internation-city Block, Chang Road, Fengze District, Quanzhou, Fujian, China.  
Product Description: TWO WAY RADIO  
Brand Name / Model Name: LUTON, KINGPO / LT-558JY, KP-558JY

Option on the Essential Requirements  
Article 3.1a): Health and Safety: Remarks see annex  
Article 3.1b): Electromagnetic Compatibility: No remarks  
Article 3.2: Effective Use of the Radio Spectrum: No remarks

CE-marking  
Marking Example (Class 2): **CE 0700 0**

This certificate is issued in accordance with the Directive 1999/5/EC of the European Parliament and the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity dated 9<sup>th</sup> March 1999 and is only valid in conjunction with the following annex (2) report.

Bloomberg, 24 January 2013  
Place, Date of Issue:  Signed by Peter Grieb, Notified Body

Phone: +490233-900-34  
Fax: +490233-900-39  
info@phoenix-testlab.de

PHOENIX TESTLAB GmbH  
Königsallee 19  
D-42699 Solingen, Germany  
www.phoenix-testlab.de

## Expertise

Expert Opinion of the Notified Body on the Conformity Assessment according to Article 10.5 of R&TTE Directive 1999/5/EC

**PHOENIX TESTLAB**  
EU Identification Number 0700

Responsible by:  Notified Body

Expertise No.: 13-111759  
Certificate Holder: BOND TELECOM CO., LTD.  
Address: 820# No. 1 BLDG, INTERNATION-CITY BLOCK, CHANG RD, FENGZE DISTRICT, QUANZHOU FUJIAN, CHINA.  
Product Description: CB Radio  
Brand Name / Model Name: TITANUM, LUTON / LT-43 TURBO, LT-43  
Frequency Range: 35.960 MHz; 47.400 MHz;  
Transmitted Power: 35.91 dBm ERP  
Article 3.1a): Health and Safety: Remarks see annex  
Article 3.1b): Electromagnetic Compatibility: No remarks  
Article 3.2: Effective Use of the Radio Spectrum: No remarks

CE-marking  
Marking Example (Class 2): **CE 0700 0**

This certificate is issued in accordance with the Directive 1999/5/EC of the European Parliament and the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity dated 9<sup>th</sup> March 1999 and is only valid in conjunction with the following annex (2) report.

Bloomberg, 31 May 2011  
Place, Date of Issue:  Signed by Peter Grieb, Notified Body

Phone: +490233-900-34  
Fax: +490233-900-39  
info@phoenix-testlab.de

PHOENIX TESTLAB GmbH  
Königsallee 19  
D-42699 Solingen, Germany  
www.phoenix-testlab.de

# DG-TD501

## DMR RADIO COMPATIBLE WITH MOTOTRBO

Support single, group and general call  
Kill, Stun and revive Monitor, remote control



- VOX, FM, Scanning
- PC Programming
- FLASHLIGHT, Power saving
- Noise suppression function
- SMS, date transmitting
- GPS (optional)
- AMBE+2TM vocoder
- Manual dialing and storage dialing
- Super high battery with 1700mAh



## PROFESSIONAL DIGITAL HANDHELD RADIO (DMR)

Support Data communication  
Support short message service

# DMR-8100H



- Voice coding algorithm: Single-chip solution for Vocoder, Baseband Modem, Communication Protocol Stack and Central Processing; with the multi-band excitation (AMBE + +) vocoder that conform with European standard, it can communicate with compatible models.
- Analog/Digital auto-adaptation: Support both analog and digital mode and automatic adaptation.
- Enhanced Call Management: Includes Emergency Alarm, Call Prompt, Remote Monitoring, Single Call, Group Call, All Call, Remote kill, Remote Halo, Resurrection, Radio Checking Function, etc.
- Support DTMF/CTCSS/DCS/5-tone/MDC1200 (in Analog Mode)



# LT-303


## FM RADIO WIDE SCREEN FCC APPROVED

Special glass, scratch resistance  
High/Low Power Switchable



- Full band, Different Frequency Function
- Humanized menu
- Built-in DTMF (ANI-6)
- Monitor
- Auto Battery Save
- Low Battery Alert
- Busy Channel Lockout
- VOX
- CTCSS-50/CDCSS-105
- TOT (Time-out timer)
- Priority Channel Scan

VHF/UHF Two-way Radio

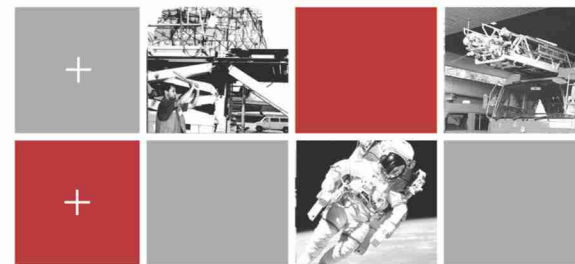

# 50 GROUPS CTCSS+105 GROUPS DCS

Squelch 0-9 level adjustable  
Channel space 12.5/25KHz



# LT-002


- Emergency alarm
  - PC program
  - Monitor, 3W
  - Wire clone
- Auto battery save
- Low battery alert
- Squelch Tail Elimination (STE)
  - Busy channel lockout
  - TOT (Time Out Timer)
  - Channel scan
- Purple, blue, orange front cases for choice

# LT-52

CTCSS/DCS  
BUSY CHANNEL LOCKOUT



- Emergency alarm function
- Hi/Low power selectable
- Monitor function
- 50 CTCSS & 105 DCS
- Channel Scan
- Busy channel lockout
- 136-174MHz/400-470MHz, 5W

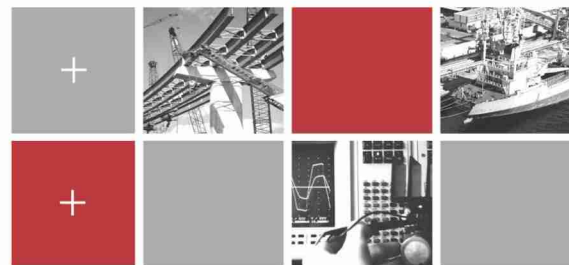

SCRAMBLER  
VOICE COMPANDER  
CTCSS/DCS

# LT-66



- Emergency Alarm function
- Scrambler (1 group), Voice Compander
  - Hi/Low power selectable
- Wide/Narrow bandwidth selectable
  - Busy channel lockout
- 50 CTCSS & 105 DCS
  - Transmit limit
  - Wire clone



# LT-K10

## PROFESSIONAL 2WATTS TWO WAY RADIO

Voice guide function in English



- Frequency: 136-174MHz or 400-470MHz
- Power output: 2W
- 16 Channels
- CTCSS, DCS
- Time out timer
- Battery power saving function
- Monitor
- VOX



## 16 CHANNELS 1200MAH LI-ION BATTERY

400-470MHz or 136-174MHz  
51 groups of CTCSS/214 groups of DCS



# LT-56

- Frequency: 136-174MHz or 400-470MHz
  - Power output: 2W
  - 16 Channels
  - CTCSS, DCS
  - Time out timer
- Busy channel lock out
- Battery power saving function
  - Monitor
  - VOX






# LT-558UV

## DUAL BANDER 1+1 SMART CHARGER VOX FUNCTION

Meets IP66 standards waterproof structure  
Three- dimension protective structure

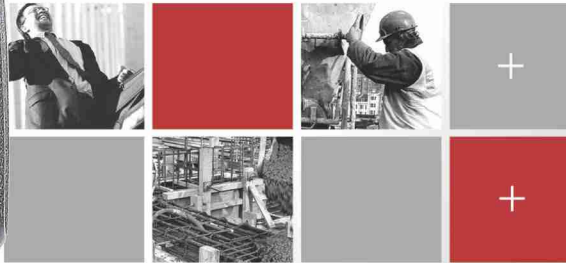

- Dual band, 96 channels, 5W
- Emergency Alarm Function
- TOT (Time-out timer)
- High/Low Power Switchable
- PC Programmable
- Channel spacing: 12.5KHz/25KHz
- 136-174MHz & 400-470MHz dual band
- CTCSS-50/CDCSS-105
- Busy Channel Lockout
- Channel Scan
- Wire Clone



# 10WATTS HIGH POWER LONGER DISTANCE COVER

136-174MHz or 400-470MHz professional two way radio  
51 groups of CTCSS/214 groups of DCS




# LT-558H

- 16 channels
- 1500mAh or 2600mAh battery for choice
- The three-dimension protective structure makes the battery connecting more tighten
- Meets IP66 standards waterproof structure
  - CTCSS / DCS
  - TIME OUT TIMER
  - VOX, MONITOR
- HIGH POWER/LOW POWER ADJUSTABLE


# UV-3R

## DUAL BAND POCKET RADIO FM TRANSCEIVER WITH EXTENSIVE RECEIVE FREQUENCY COVERAGE

50 CTCSS 104 CDCSS  
99 Channels (1 Emergency Channel)

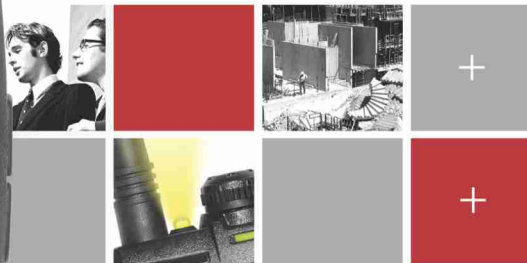

- Time-out Timer
- Key Tone, VOX
- FM Radio Built-in
- Call Tone (1750KHz)
- Squelch Set, Monitor
- Electronic Volume Adjusting (8 Level)
- Keypad Lock, Battery Save
- Backlight ON/OFF/Key
- Power Capacity Display (ON)
- Low Battery Alert
- Reset to Factory Default
- PC programming

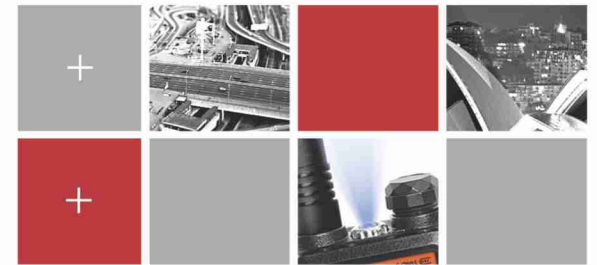

# 128 CHANNELS DUAL BAND POCKET RADIO

400-480MHz & 136-174MHz  
51 groups of CTCSS/214 groups of DCS



# UV-5R

- Dual Watch
- 5W Power Output
- Priority Channel Scanning
- VOX/FM Radio Built-in
- Emergency Alarm
- Call Tone (1750Hz)
- Battery Power Saving Function
- High Illumination Flashlight
- VOX, SCAN, MONITOR
- CTCSS, DCS

# LT-888

PMR, 8 CHANNELS  
SMART DESIGN  
HIROSE CONNECTOR


Audio output 200mW, Aerial in handle, Built-in.



- 2W, Frequency 400-480MHz or PMR 8 Channels
- No Microphone, No Speaker; Hirose Connector
- CTCSS, DCS, VOX
- Battery: 1250mAh
- Function Lock Via Software
- Belt Clip On Back With Screws
- Using Hirose Connector
- Earphone & Spk-Mic's

IMPROVED VERSION ON  
LT-268, BETTER PERFORMANCE  
BETTER HEAT-RELEASE

4W RF power, 40 AM/FM channels

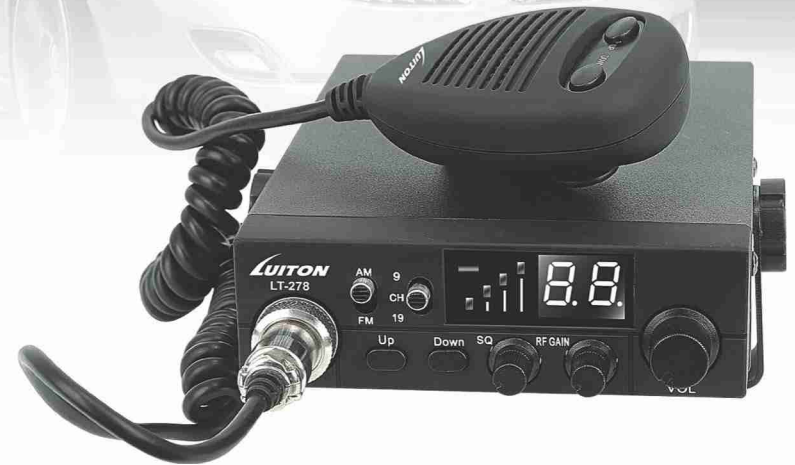

# LT-278

- Channel 9 and channel 19 switchable
- Mode AM/FM switch, RF gain control
- RSSI indication (4PCS LED indication)
  - 2-Digit channel indication
  - Volume with power ON/OFF control
- TX/RX LED indication, Up/Down microphone
  - Front microphone plug
  - Jack for external speaker
- Manual Squelch, ANT Connector
- FREQ. expanding (A,B,C,D,E,F,POLAND and NZ band)





## FLOAT AND FLASH IP-X7 (1METER DEPTH FOR 30 MINUTES)

Dual/Tri-watch Functions

# LT-M36



- 3.7V Energy-saving Circuitry
- Easy to See Large LCD
- Built-in Regular Charger Circuitry
- 4-step Battery Life Indicator
- Tag Scan and Favorite Channel Functions
- Aquaquake Draining Function
- Auto Scan Function
- TX: 156.000-161.450MHz
- RX: 156.000-163.425MHz
- Power Output 5W/1W
- 1500mAh Li-ion Battery


## DUAL-WATCH AND TRI-WATCH BUILT-IN DSC


Professional Marine Band & River Band radio



# LT-M507

- 25W Power Output
- Favorite Channel Function
- Aquaquake Draining Function
- Weather Channels and Weather Alert
- Large Easy-to-See LCD, Scan Resume Timer
- 1meter Depth for 30 Minutes
- External GPS Receiver Function
- DSC Call Auto-answer Function
  - TX: 156.025-157.425MHz
  - RX: 156.050-163.275MHz

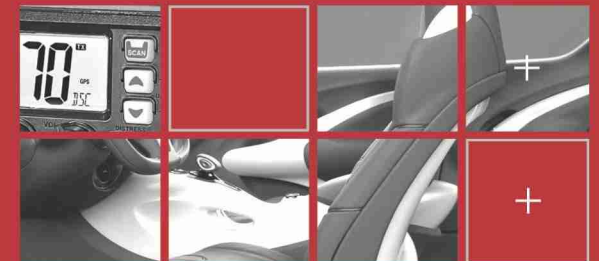

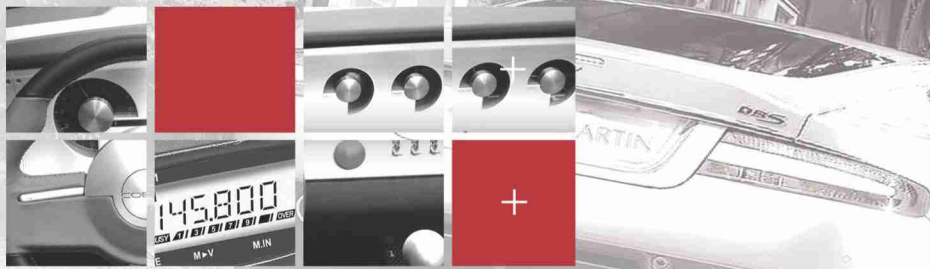

# LT-271A LT-471A

60W POWER OUTPUT  
ALPHANUMERIC LCD  
AND ILLUMINATED KEYPAD



- High RF Power Output (60W)
- Weather Alert/Rx (US Only)
- US MII-STD 810 C/D/E/F
- Alphanumeric LCD And Illuminated Keypad
- DTMF Microphone
- High-quality Front Speaker
- 200 Memory Channels Plus 1 Call-channel
- Memory Name Function
- Multiple Scan Functions
- CTCSS & DCS Encoder/Decoder
- High Frequency Stability




# LT-281A LT-481A

65W POWER OUTPUT



- Rugged, Compact Construction
  - High Power Output (65W)
- Alphanumeric LCD And Illuminated Keypad
  - Impressive Front Speaker
  - Memory Name Function
- 200 Memory Channels Plus 1 Call-channel
  - Multiple Scan Functions
- CTCSS & DCS Encoder/Decoder
  - Weather Alert/RX (US Only)



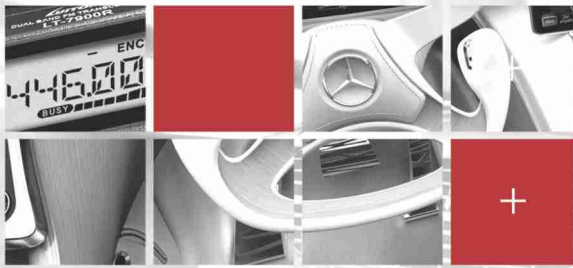

# LT-7900R

## EXCEPTIONALLY WIDE RECEIVER COVERAGE

2 Meter/70cm Dual Band FM Transceiver



- 50Watts High Power Output
- Large LCD Display
- Over 1000 Memory Channels
- NOAA Weather Alert
- YSK-7800 Remote Mounting Kit (option)
- WIRES Internet Linking Capability

# CTCSS & DCS 1750HZ TONE 2 TONE/5 TONE

Frequency/Channel scanning  
High/Mid/Low power selectable



# LT-9000

- 136-174MHz/245-245.9875MHz (220-260MHz)/400-480MHz
  - VHF: 10W/25W/60W UHF: 45W/25W/10W
  - 1750Hz Tone; ANI; Repeater offset shift
- Keypad lock function; Battery voltage display
- Contact book, TX inhibit; Channel name editing
  - DTMF/2 tone/5 tone; Scrambler (Optional)
  - Remote kill/stun/activate/revive
  - Auto Power off
- VFO step setting: 5/6.25/10/12.5/20/25/50KHz





# LT-9900

## QUAD BAND OPERATION OVER 800 MEMORY CHANNELS

CTCSS/DCS Built-in  
DTMF Function



- Convenient Access To WIRES and Other Internet-linking Systems
- Cross-band Repeat Capability
- General Specification
- Frequency Range: RX: 28.000-29.700MHz 50.000-54.000MHz  
108.800-180.000MHz (108.800-136.995MHz FM)  
320.000-480.000MHz 700-985MHz(Cellular Blocked)  
TX: 28.000-29.700MHz 50.000-54.000MHz  
144.000-148.000MHz 430.000-450.000MHz
- RF Power: 50/20/10/5W(29/50/144MHz) 35/20/10/5W(430MHz)
- Operating Modes: F3, F2, F1
- Frequency Step: 5/10/12.5/15/20/25/50KHz

# 200 MEMORY CHANNELS MEMORY CHANNEL GROUP MANAGEMENT

Dual Tone Mutil-frequency (DTMF)



# LT-900

- Many Kinds of Scanning Mode are Easy-to-use, High Efficiency and Selectable
  - Compose Simple Repeater, ANI Function
  - Microphone Function Keys Programmable
    - Voice Companding, CTCSS/DCS/2Tone
- Shared Frequency, Pilot Frequency, Offset Frequency Selectable
  - Auto-power off Once Beyond Normal Power-line Voltage
- Frequency: 134.0000~175.9950MHz 340.0000~399.9950MHz  
400.0000~479.9950MHz
- Power Output: 5/15/25/40/60W 5/10/20/30/50W 5/10/20/30/50W





## LT-V8000

75W POWER OUTPUT  
REMOTE CONTROL MICROPHONE



- 75W of power for your ultimate 2M mobile experience
- HM-133V, remote control microphone
- Dynamic Memory Scan (DMS)
- CTCSS and DTCS operation standard
- Weather Alert Scan
- Easy Operation
- Standard DTMF encoder and optional decoder
- FM narrow mode switchable
- Selectable squelch delay
- 10dB squelch attenuator
- Cloning capability from PC or between radios

65W POWER OUTPUT  
DYNAMIC MEMORY SCAN



## LT-2200H

- Support UT-118
- Simple operation
- Dynamic Memory Scan (DMS)
- CTCSS and DCS operation standard
- 24 DTMF autodial memories
  - Selectable squelch delay
- Built-in 10dB squelch attenuator
- DTMF code squelch and pager function
  - with optional DTMF decoder, UT-108

